


Note: Shown for
Type A, B and
C Bms. Replace
1'-0" dimensions
with 1'-2" for
Type IV Bms.

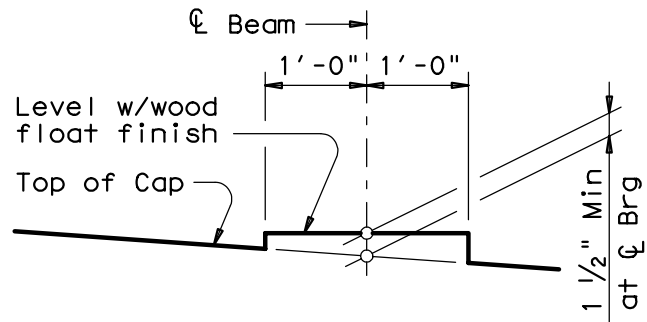

BEARING SEAT DETAIL

(Bearing surface shall be clean and free of
all loose material before placing bearing pad.)

Fig. 4-28